


PLAN VIEW

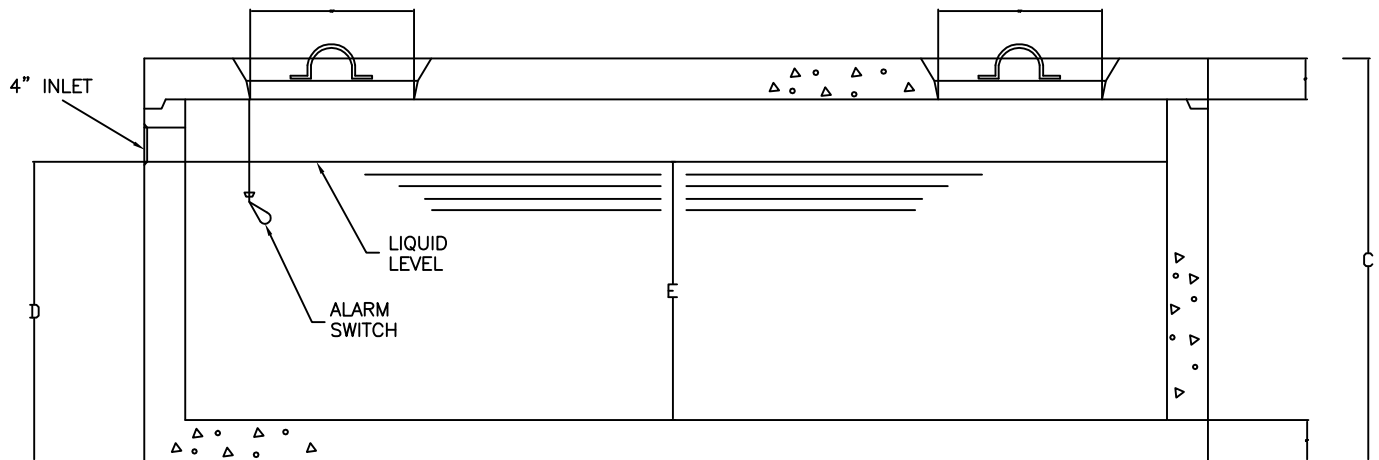

SIDE ELEV. VIEW SECTIONED

DATA CHART

| ITEM NO. |            | GALLON CAPACITY | A      | B     | C      | D     | E      | APPROX. WEIGHTS                    |
|----------|------------|-----------------|--------|-------|--------|-------|--------|------------------------------------|
| STD.     | H.D.       |                 |        |       |        |       |        |                                    |
| HT-1500  | HT-1500-HD | 1,500           | 13'-0" | 7'-0" | 4'-3"  | 3'-4" | 2'-10" | TOP 6,800 LBS.<br>BASE 14,000 LBS. |
| HT-2000  | HT-2000-HD | 2,000           | 13'-0" | 7'-0" | 4'-11" | 4'-0" | 3'-6"  | TOP 6,800 LBS.<br>BASE 15,000 LBS. |

DESIGN DATA & GENERAL NOTES

- 1) CONCRETE: 4,000 PSI @ 28 DAYS.
- 2) CEMENT: PORTLAND TYPE I OR III PER ASTM C150.
- 3) REINFORCING: 6X6X10W.W.M. OR FIBERS.
- 4) DESIGN LOADING: H-10
- 5) CONSTRUCTION JOINT: SEALED W/ASPHALT.
- 6) HEAVY-DUTY TANK TOPS REINFORCED W/ 5/8" ROD @ 12"O.C. EACH WAY.
- 7) ALARM UNIT WITH LIGHT & BUZZER IS INCLUDED WITH HOLDING TANK.

**HOLDING TANKS 1,500 & 2,000 GALLON**

**VARIOUS ITEM #'S**

[www.georgerobertsco.com](http://www.georgerobertsco.com)

**George R. Roberts Co.**  
Precast Concrete Products

192 Biddeford Road Phone 207-324-6571  
Alfred, Maine 04002 Fax 207-324-8533