


18" ACCESS COVER,
(OPTIONAL 32" HOLE
SOLID COVER, OR
RE-BAR GRATE)

PLAN VIEW

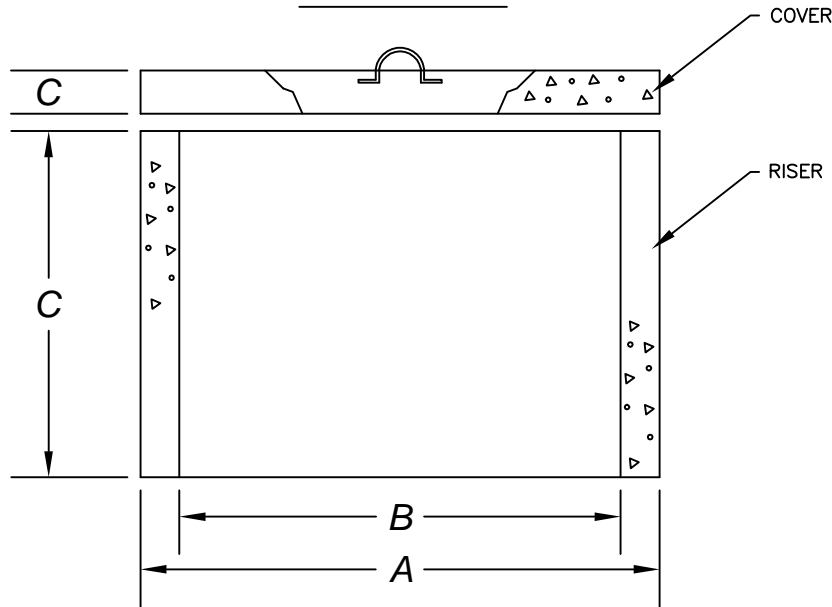

SIDE ELEV. VIEW SECTIONED

DATA CHARTS

WELL TILE					
ITEM NO.	A	B	C	APPR. WGT.	DESCRIPTION
WT-11	3'-0"	2'-7"	11"	205 LBS.	RISER
WT-22	3'-0"	2'-7"	22"	410 LBS.	RISER
WT-44	3'-0"	2'-7"	44"	820 LBS.	RISER
WTC	3'-0"	-	3"	400 LBS.	COVER, SOLID
WTCAC	3'-0"	-	3"	400 LBS.	COVER, W/ACCESS
WTCGR	3'-0"	-	3"	350 LBS.	COVER, W/GRATE
WT-13	3'-5"	3'-0"	13"	305 LBS.	RISER
WT-24	3'-5"	3'-0"	24"	580 LBS.	RISER
WT-48	3'-5"	3'-0"	48"	1,160 LBS.	RISER
WTC-3-5	3'-5"	-	4"	500 LBS.	COVER

WELL CASINGS					
ITEM NO.	A	B	C	APPR. WGT.	DESCRIPTION
WC	5'-4"	4'-6"	4'-8"	2,531 LBS.	RISER
WCC-5-18	5'-4"	-	5"	1,520 LBS.	COVER, W/ACCESS
WCC-5-32	5'-4"	-	5"	1,380 LBS.	COVER, TRANSITION TO W.T.
WCC-9-18	5'-4"	-	5"	2,225 LBS.	COVER, HD, W/ACCESS
WCC-9-32	5'-4"	-	9"	2,025 LBS.	COVER, HD, TRANS. TO W.T.

DESIGN DATA & GENERAL NOTES

1. CONCRETE: 4,000 P.S.I @ 28 DAYS.
2. CEMENT: PORTLAND TYPE III PER ASTM C150-81
3. REINFORCING: 6X6X10 W.W.M., OR FIBERS.
4. A SPREADER BAR SHOULD BE USED WHEN LIFTING WELL TILE & CASINGS

WELL TILES AND COVERS

VARIOUS ITEM #'S

www.georgerobertsco.com

George R. Roberts Co
Precast Concrete Products

192 Biddeford Road Phone 207-324-657
Alfred, Maine 04002 Fax 207-324-853