


PLAN VIEW

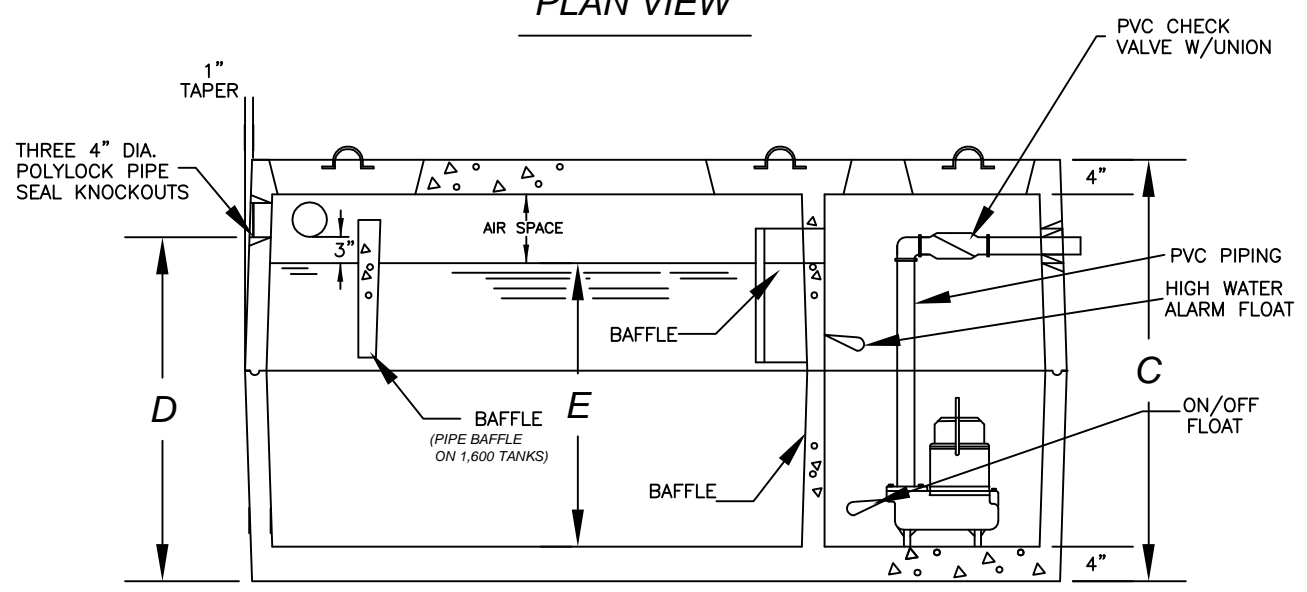

SIDE ELEV. VIEW SECTIONED

DATA CHART

| ITEM NO. | | GALLON CAPACITY | | | A | B | C | D | E | APPROX. WEIGHT |
|---------------|------------------|-----------------|-------|-----|--------|-------|-------|--------|-------|----------------|
| STD. | H.D. | TOTAL | #1 | #2 | | | | | | |
| RST 2C-2.5 | RST 2C-2.5-HD | 1,250 | 1,000 | 250 | 9'-0" | 6'-0" | 5'-4" | 4'-7" | 4'-0" | 9,500 LBS. |
| RST 2C-3.5 | RST 2C-3.5-HD | 1,600 | 1,250 | 350 | 10'-0" | 6'-4" | 5'-8" | 4'-10" | 4'-3" | 13,400 LBS. |

DESIGN DATA & GENERAL NOTES

1. CONCRETE: 4,000 P.S.I @ 28 DAYS.
2. CEMENT: PORTLAND TYPE III PER ASTM C150-81
3. REINFORCING: 6X6X10 W.W.M., OR FIBERS.
4. 1-1/2" OR 2" PIPING AVAILABLE.
5. COMES ASSEMBLED WITH PUMP, PIPING, VALVE, CONTROLS, & HIGH WATER ALARM UNIT.
6. RISERS AVAILABLE IN VARIOUS HEIGHTS.

2 COMPARTMENT SEPTIC TANK/PUMP STATION

VARIOUS ITEM #'S

www.georgerobertsco.com

George R. Roberts Co.
Precast Concrete Products

192 Biddeford Road Phone 207-324-6571
Alfred, Maine 04002 Fax 207-324-8533